

6

5


4

3

2

1

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

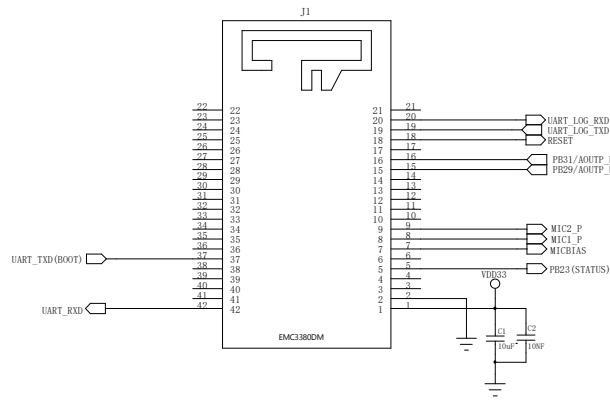

NOTE:

- 1.Pin37,42 is recommended for user uart port,refer to EMC3380 datasheet.
- 2.Pin19,20 is debug uart port for ATE Mode,refer to EMC3380 datasheet.
- 3.In Normal mode,pin37(High) is necessary.
- 4.In ATEl mode,pin37(low) and pin5(high) is necessary.
- 5.In QC mode,pin37(low) and pin5(low) is necessary.

COMPANY:				Shanghai MXCHIP Corp			
TITLE:				EMC3380 REF SCH			
DRAWN:	Zhangjunli	DATED:	2020.10.28	CODE:	SIZE:	DRAWING NO:	REV:
CHECKED:	Xuwei	DATED:	2020.10.29	B			
QUALITY CONTROL:	Huangyong	DATED:	2020.10.29				
RELEASED:	Liuchangqing	DATED:	2020.10.29	SCALE:	SHEET: 1 OF 1		