REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

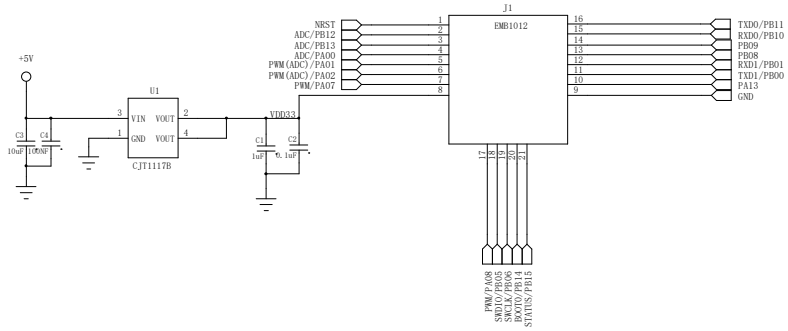

NOTE:

1.C1 & C2 nearby EMB1016 pin 19,VDD33 power supply reconmended used by LDO only(important).

1.Pin16,17 is recommended for user uart port,refer to EMB1016 datasheet.

3.Pin7,15 is debug uart port for Debug,refer to EMB1016 datasheet.

4.In ISP mode,pin20(high) is necessary.

5.In QC mode,pin21(low) is necessary.

DRAWN: Zhangjunnli	DATED: 2021.11.18
CHECKED: Xuwei	DATED: 2021.11.18
QUALITY CONTROL: Huangyong	DATED: 2021.11.19
RELEASED: Liuchangqing	DATED: 2021.11.19

COMPANY: Shanghai MXCHIP Corp			
TITLE: EMB1016 REF SCH			
CODE:	SIZE: B	DRAWING NO:	REV:
SCALE:	SHEET: 1 OF 1		