

6

5


4

3

2

1

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

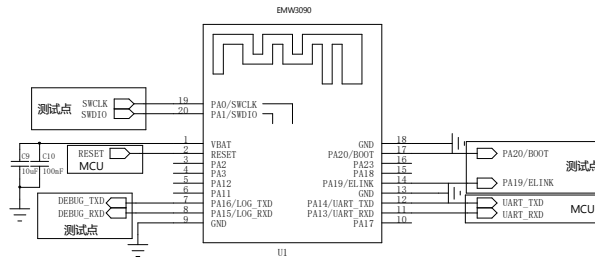

NOTE:

- 1.Pin11,12 is recommended for user uart port, refer to EMC3090 datasheet.
- 2.Pin7,8 is debug uart port for ATE Mode, refer to EMC3090 datasheet.
- 3.reset如果不接MCU可悬空，模组内部有上拉。

DRAWN:	Zhangjunli	DATED:	2022.11.28
CHECKED:	Xuwei	DATED:	2022.11.29
QUALITY CONTROL:	Huangyong	DATED:	2022.11.29
RELEASED:	Liuchangqing	DATED:	2022.12.15

COMPANY:				Shanghai MXCHIP Corp							
TITLE:								EMC3090 REF SCH			
CODE:	SIZE:	DRAWING NO:				REV:					
	B										
SCALE:						SHEET: 1 OF 1					