

# Realtek

# Bluetooth

# MP Flow

(Linux)

Date: 2018/05/4

**This document is subject to change without notice. The document contains Realtek confidential information and must not be disclosed to any third party without appropriate NDA.**

## 1. Overview

This document is used to introduce MP (Mass Production) test tool for Realtek Bluetooth chip series. Customers should comply with the steps and requirements under this document. Contact Realtek Bluetooth FAE if any problem arises in the use of MP flow.

Realtek

## 2. Prerequisites

Before MP tool startup, below items should be checked:

- a) The Bluetooth Chip embedded is provided by Realtek;

Realtek Bluetooth Chip Number
RTL8723B series
RTL8761A series
RTL8821A series
RTL8703B series
RTL8723D series
RTL8822B series
RTL8821C series

- b) The Bluetooth on target production is available and works normally;

### 2.1 Binary Files

P tool package is provided to customers in binary format:

rtlbtmp

MP ADB tool

btmpt.default.so

MP library

Customers should copy these binary files to respective directories on target production:

rtlbtmp --> /system/bin/ chmod 755 /system/bin/rtlbtmp

btmpt.default.so --> /system/lib/hw/

mp\_rtlxxx\_fw, mp\_rtlxxx\_config --> /system/etc/firmware/

Notice: If the system is android o or above

rtlbtmp --> /vendor/bin/ chmod 755 /system/bin/rtlbtmp

btmpt.default.so --> /vendor/lib/hw/

mp\_rtlxxx\_fw, mp\_rtlxxx\_config --> /vendor/firmware/

## 3. MP Tool Usage

### 3.1 MP Initial Commands

These commands used to initialize Bluetooth DUT in MP mode are listed as below:

MP Command	Parameters	Return	Description
rtlbtmp	None	[success]	Start the MP CMD tool.
enable	USB: enable usb:/dev/rtk_btusb	[success]	Enable USB I/F Bluetooth MP stack and download FW code. Device node is <b>fixed as rtk_btusb</b> .
	UART5: enable uart:/dev/ttyS0 enable uart5:/dev/ttyS0 UART4: enable uart4:/dev/ttyS0	[success]	Enable Uart I/F Bluetooth MP stack and download FW code. Device node is <b>chosen by vendor specifically</b> . H5 (UART5) or H4 (UART4) is determined by the chip configurations. Customers can consult FAE for detailed information.
disable	None	[success]	Disable Bluetooth MP stack and close the device.
quit	None	None	Exit from the MP CMD tool.
help	None	None	List all MP CMDs supported.

**NOTE:** Before running the MP CMD tool, BT on UI settings should be **disabled**; otherwise, MP tool will be at abnormal status.

#### 3.1.1 Start MP CMD Tool

```
# rtlbtmp
```

```
root@tristan-PORTEGE-R700:~# rtlbtmp
::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
::::::::: Bluetooth MP Test Tool Starting ::::::::::
> |
```

#### 3.1.2 Enable MP Stack

Check Bluetooth stack HCI interface first, then run the enable MP stack CMD.

```
> enable usb:/dev/rtk_btusb // usb I/F
```

```
> enable uart:/dev/ttyS0 // uart I/F, device node specified by vendor (platform)
```

```
root@tristan-PORTEGE-R700:~# rtlbtmp
::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
::::::::: Bluetooth MP Test Tool Starting ::::::::::
> enable uart:/dev/ttyUSB0
> > enable[Success:0]
|
```

### 3.1.3 Disable MP Stack

> disable

```
> disable
disable[Success:0]
> █
```

### 3.1.5 Exit MP Tool

> quit

```
> quit
::::::::: Bluetooth MP Test Tool Terminating :::::::::::
root@tristan-PORTEGE-R700:~# █
```

### 3.1.6 Lookup MP CMDs

> help

```
> help
help :: Lists all available console commands
quit :: Abort the MP tool test app
enable :: Enable bluetooth
disable :: Disable bluetooth
bt_mp_HciCmd :: Send HCI Commands
bt_mp_GetParam :: Get all/individual exposed parameters
bt_mp_SetParam :: Set specific parameters<index,value>
bt_mp_SetParam1 :: Set series 1 parameters
bt_mp_SetParam2 :: Set series 2 parameters
bt_mp_SetConfig :: Set configurations to the specific file
bt_mp_Exec :: Execute specific action<action id>
bt_mp_Report :: Report specific info according to item selected
bt mp_RegRW :: R/W Modem, RF, SYS & BB registers
> █
```

## 3.2 MP Mode Control Parameters Commands

### 3.2.1 Control Parameters Commands Format

These commands used to set/get Bluetooth DUT parameters.

MP Command	Parameters	Return		
bt_mp_SetParam	Index0,value0;Index1,value1;...;IndexN,valueN	Return Index	Return Status	
bt_mp_GetParam	Index	Return Index	Return Status	Return Value

TABLE CONTROL\_PARAM\_CMD

### 3.2.2 Control Commands: Set/Get parameter command

You can use “bt\_mp\_SetParam” to set parameters and can use ”bt\_mp\_GetParam” to check it.  
The Format is “bt\_mp\_SetParam Index0,value0; Index1,...;IndexN,valueN”.

Example : If you want to set the channel 10 and packet type “BT\_PKT\_3DH5”, you can use”  
bt\_mp\_SetParam 0x01,0x0a;0x02,0x08”

```
> bt_mp_SetParam 0x01,0x0a;0x02,0x08
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,2,0x00
```

Or set channel and packet type separately.

```
> bt_mp_SetParam 0x01,0x0a
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,1,0x00

> bt_mp_SetParam 0x02,0x08
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,2,0x00
```

Use **bt\_mp\_GetParam** to check parameter settings.

```
> bt_mp_GetParam 0x01
bt_mp_GetParam[Success:0]
> bt_mp_GetParam,1,0x00,0x0a

> bt_mp_GetParam 0x02
bt_mp_GetParam[Success:0]
> bt_mp_GetParam,2,0x00,0x08
```

The parameter Indexes define in “PARAM\_INDEX” Table.

INDEX	VALUE	Length (Byte)	Value Range	Table Index
0	PGRawData	256	Row data	None
1	ChannelNumber	1	0~78	None
2	PacketType	1	0~9	<b>See PKT_TYPE</b>
3	PayloadType	1	0~7	<b>See PAYLOAD_TYPE</b>
4	TxPacketCount (only for packet tx)	2	0~0xFFF	<b>See Section3.2.3</b>
6	WhiteningCoeffValue	1	0x00~0x7F	0x00~0x7F: Enable Whitening 0x80: Disable Whitening
7	TxGainIndex	1	Realtek define	<b>See Section3.2.5</b>
9	PacketHeader	4	0x0~0x3FFFF	<b>See PACKET_HEADER</b>
10	HoppingFixChannel (for Hopping mode)	1	0 : Disable 1 : Enable Fix Channel	None
11	HitTarget	6	6 bytes	None
14	Xtal	4	0~0x7F	Depend Chip
15	LEDDataLen	1	0~0x255	0~0x255 (BT4.0 : 0x00~0x0x25)
16	PHY	1	1~4	<b>See BLE_PKT_TYPE</b>
17	ModulationIndex	1	0,1	<b>See BLE_MODULATION_TYPE</b>
18	<ul style="list-style-type: none"> <li>a. set/get enable/disable tx power tracking</li> <li>b. bt_diff_s0s1</li> <li>c. set gain K</li> <li>d. set flatness</li> <li>e. set tx default power</li> <li>f. SET_K_TX_CH_PWR</li> <li>g. TX_PATH_LOSS_MODULE</li> <li>h. CONFIG_EXTEND</li> <li>i. set Antenna s0/s1</li> <li>j. set hopping start channel and stop channel</li> </ul>			

**Table PARAM\_INDEX**

The packet types are defined in Table PKT\_TYPE:

NAME	INDEX	Payload Length in bits
BT_PKT_DH1	0	0~27*8
BT_PKT_DH3	1	0~183*8
BT_PKT_DH5	2	0~339*8
BT_PKT_2DH1	3	0~54*8
BT_PKT_2DH3	4	0~367*8
BT_PKT_2DH5	5	0~679*8
BT_PKT_3DH1	6	0~83*8
BT_PKT_3DH3	7	0~552*8
BT_PKT_3DH5	8	0~1021*8
BT_PKT_LE	9	0~39*8

**Table PKT\_TYPE**

The payload types are defined in Table PAYLOAD\_TYPE.

NAME	INDEX
BT_PAYLOAD_TYPE_ALL0	0
BT_PAYLOAD_TYPE_ALL1	1
BT_PAYLOAD_TYPE_0101	2
BT_PAYLOAD_TYPE_1010	3
BT_PAYLOAD_TYPE_0x0_0xF	4
BT_PAYLOAD_TYPE_0000_1111	5
BT_PAYLOAD_TYPE_1111_0000	6
BT_PAYLOAD_TYPE_PRBS9	7

**Table PAYLOAD\_TYPE**

Packet type	Payload(Bits)	Packet Header Hex
DH1	216	33820
DH3	1464	39858
DH5	2712	A078
2DH1	432	33820
2DH3	2936	C050
2DH5	5432	3F870
3DH1	664	15C40
3DH3	4416	39858
3DH5	8168	A078

**Table PACKET\_HEADER**



### 3.2.3 TxPacketCount parameter

TxPacketCount is used to set how many TX packets will be transmitted. The range of TxPacketCount is from 0 to 0xFFFF. In UI mode, the value of TxPacketCount is “0” that means to send the most tx packet counts “0xFFFF”. In FW mode, the value of TxPacketCount is “0” that means to send tx packet counts continuously.

### 3.2.4 WhiteningCoeffValue parameter

The range of WhiteningCoeffValue is from 0 to 0x7F. However, if WhiteningCoeffValue is “0x80”, it means to disable whitening.

### 3.2.5 TxGainIndex parameter

IC TYPE	MODE	GET DEFAULT POWER	USED by “bt_mp_Exec” COMMAND
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4	“bt_mp_Exec”  12~14(pkt tx) 15~17(cont tx) 18~20(pkt rx) 28~29(le cont tx)
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6	
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6	
RTL8761A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5	
	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of “TxGainIndex” value is from 0 to max tx index.	“bt_mp_Exec”  30~31(pkt tx) 32~33(pkt rx) 34~35(cont tx) 36~37(le cont tx)

RTL8723D RTL8822B RTL8821C RTL8822C RTL8761B	FW mode	<b>Get Tx Power Info</b> #./bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17, Status, max tx power index, 1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.	<b>"bt_mp_Exec"</b>  12~14(pkt tx) 15~17(cont tx) 18~20(pkt rx) 28~29(le cont tx)  30~31(pkt tx) 32~33(pkt rx) 34~35(cont tx) 36~37(le cont tx)
--	---------	---	---

Only in packet tx, the UI mode and FW mode are different. In other operations they are the same. In UI mode, the value of TxPacketCount is "0" that means to send packet "0xFFF" counts. In FW mode, the value of TxPacketCount is "0" that means to send packets continuously.

### 3.3 MP Mode execute Commands

Using this command to control bt mp action, and get current report.

MP Command	Parameters	Return	
bt_mp_Exec	Action	Return Action	Return Status

You can use “bt\_mp\_Exec ACTION\_INDEX”. The definition of ACTION\_INDEX can refer to “BT\_ACTIONCONTROL\_TAG” Table.

Example: If you want to run “PACKET\_TX\_START” this action, please use the “bt\_mp\_Exec 12” command. On the contrary “bt\_mp\_Exec 14” is “PACKET\_TX\_STOP”.

```
> bt_mp_Exec 12
bt_mp_Exec[Success:0]
> bt_mp_Exec,12,0x00

> bt_mp_Exec 14
bt_mp_Exec[Success:0]
> bt_mp_Exec,14,0x00
```

Command	Index	Support Chip			
		RTL8723B RTL8761A RTL8821A	RTL8723D	RTL8822B	RTL8821C
HCI_RESET	0	■	■	■	■
TEST_MODE_ENABLE	1	■	■	■	■
WRITE_EFUSE_DATA	2	■	■	■	■
SET_TX_GAIN_TABLE	3	■	■	■	■
SET_TX_DAC_TABLE	4	■	■	■	■
SET_DEFAULT_TX_GAIN_TABLE	5	■	■	■	■
SET_DEFAULT_TX_DAC_TABLE	6	■	■	■	■
SET_POWER_GAIN_INDEX	7	■	■	■	■
SET_POWER_GAIN	8	■	■	■	■
SET_POWER_DAC	9	■	■	■	■
SET_XTAL	10	■	■	■	■
REPORT_CLEAR	11	■	■	■	■
PACKET_TX_START	12	■			
PACKET_TX_UPDATE	13	■			
PACKET_TX_STOP	14	■			
CONTINUE_TX_START	15	■			
CONTINUE_TX_UPDATE	16	■			

CONTINUE_TX_STOP	17	■			
PACKET_RX_START	18	■			
PACKET_RX_UPDATE	19	■			
PACKET_RX_STOP	20	■			
HOPPING_DWELL_TIME	21	■	■	■	■
LE_TX_DUT_TEST_CMD	22	■	■	■	■
LE_RX_DUT_TEST_CMD	23	■	■	■	■
LE_DUT_TEST_END_CMD	24	■	■	■	■
READ_EFUSE_DATA	25	■	■	■	■
LE_CONTINUE_TX_START	28	■			
LE_CONTINUE_TX_STOP	29	■			
FW_PACKET_TX_START	30		■	■	■
FW_PACKET_TX_STOP	31		■	■	■
FW_PACKET_RX_START	32		■	■	■
FW_PACKET_RX_STOP	33		■	■	■
FW_CONTINUE_TX_START	34		■	■	■
FW_CONTINUE_TX_STOP	35		■	■	■
FW_LE_CONTINUE_TX_START	36		■	■	■
FW_LE_CONTINUE_TX_STOP	37		■	■	■
FW_READ_TX_POWER_INFO	38		■	■	■
SET_GPIO3_0	39		■		
SET_ANT_INFO	40		■		
SET_ANT_DIFF_S0S1	41		■		
TX_POWER_TRACKING	42		■	■	■
SET_K_TX_CH_PWR	43		■	■	
WRITE_FLASH_CONFIG	44				
TX_POWER_GAIN_K	45				
TX_POWER_FLATNESS	46				
TX_PATH_LOSS_MODULE	47				
CONFIG_EXTEND	48				
READ_FLASH_CONFIG	49				
UNLOCK_8822C	50				
SetTxPower_8822C	51				

Table BT\_ACTIONCONTROL\_TAG

### 3.4 MP Mode Report Commands

These commands used to report Bluetooth DUT TX/RX status are listed as below:

`#!/bt_mp_Report "Item Index"`

Item Index	Item Index	Return						
PKT TX = 1	1	Status	TXBits	TxCounts				
CONT TX = 2	2		TXBits	TxCounts				
PKT RX = 3	3		RxRssi	RXBits	RxCounts	RxErrorBits		
Tx Gain Table = 4	4		Tx Gain Table					
Tx DAC Table = 5	5		Tx DAC Table					
Xtal = 6	6		Xtal					
Thermal = 7	7		Thermal					
Stage = 8	8		Stage					
Efuse = 10	10		Efuse					
LE RX = 11	11		RxCounts					
LE CONT TX=12	12		TXBits	TxCounts				
FW_PKT_TX=13	13		TXBits	TxCounts				
FW_CONT_TX=14	14		TXBits	TxCounts				
FW_PKT_RX=15	15		RxRssi	RXBits	RxCounts	RxErrorBits		
FW_LE_CONT_TX=16	16		TXBits	TxCounts				
TX_POWER_INFO=17	17		Max tx power index	default tx power index				
				1M	2M	3M	BLE1M	BLE2M LR
REPORT_GPIO3_0	18							
REPORT_MP_DEBUG_MESSAGE	19							
REPORT_MP_FT_VALUE	20							
REPORT_POWER_TRACKING	21							
REPORT_MP_TXCAL_INFO	22							
REPORT_FLASH_CONFIG	23							

Realtek

## 4. RF Test Mode (Certification)

This chapter describes the entering BQB test and RF safety testing

### 4.1 Direct Test Mode - BR/EDR (BQB Certification)

Enter the Bluetooth device to Bluetooth DUT Test and stop DUT Test Mode command below:


--Enter DUT Test Mode:

Use `bt_mp_Exec(TEST_MODE_ENABLE)` to enter Bluetooth test mode.

--Stop Test Mode

Use `bt_mp_Exec(HCI_RESET)` to stop Bluetooth test mode.

The Test connection diagram :

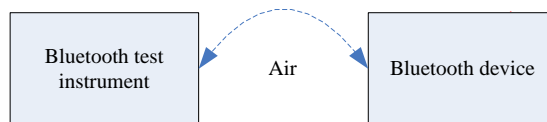

For example by ADB for android : ex usb interface and use Anritsu 8852B to test

(a) Enter MP Mode and download patch code

```
::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
:::::::::::: Bluetooth MP Test Tool Starting ::::::::::::::
> enable uart:/dev/ttyUSB0
> > enable[Success:0]
```

(b) Enter DUTMP Mode

```
> bt_mp_Exec 1
bt_mp_Exec[Success:0]
> bt_mp_Exec,1,0x00
```

(c) Begin MP test by Bluetooth test instrument (e.g. Anritsu 8852B)

(d) `bt_mp_Exec(HCI_RESET)` to stop test.

```
> bt_mp_Exec 0
bt_mp_Exec[Success:0]
> bt_mp_Exec,0,0x00
```

(e) exit MP Mode

```
> disable
disable[Success:0]
> quit
:::::::::::: Bluetooth MP Test Tool Terminating ::::::::::::::
root@tristan-PORTEGE-R700:~#
```

## 4.2 TX Test- BR/EDR (Certification)

In order to transmit a continuous signal, follow the process below:

Step0: Get default tx power index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
RTL8761A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5
	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
RTL8723D RTL8822B RTL8821C	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.



Step1: bt\_mp\_SetParam

INDEX	VALUE
1	ChannelNumber
2	PacketType
3	PayloadType
6	WhiteningCoeffValue
7	TxGainIndex
9	PacketHeader
11	HitTarget

Step2: bt\_mp\_Exec(CONTINUE\_TX\_START = 15) or (FW\_CONTINUE\_TX\_START=34)

Step3: bt\_mp\_Report 2

Step4: bt\_mp\_Exec(CONTINUE\_TX\_STOP = 17) or (FW\_CONTINUE\_TX\_STOP=35)

## 4.3 LE Direct Test Mode (BQB Test)

After testing BT4.0 only enable device and download patch code, you should jump interface to the instrument.


Step 1: rtlbtmp

Step 2: enable (xxxxxxx)

Step 3: Jump hardware interface to the instrument.

Step 4: Begin test.

BLE is a schematic diagram of the test for Certification:

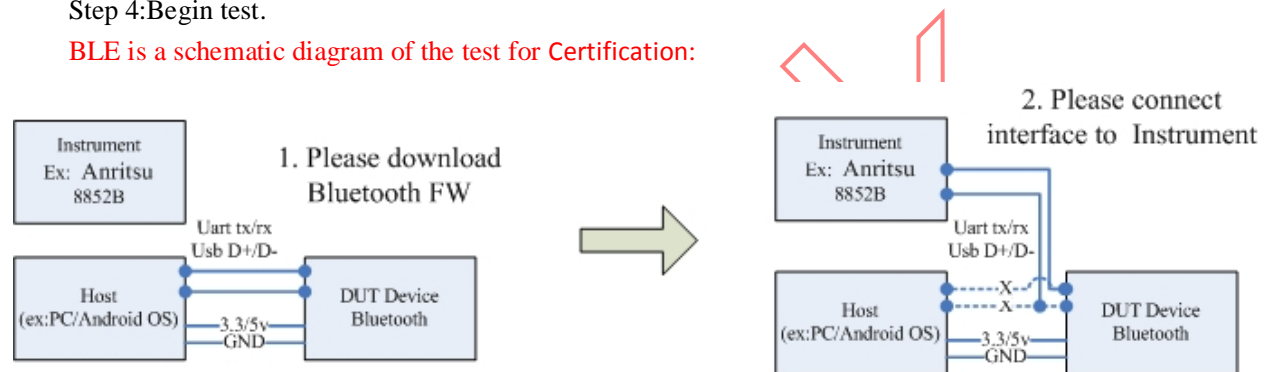

## 4.4 LE Certification TX Mode (Certification)

In order to facilitate RF safety testing, such as the band edge.

We often use to facilitate continuous tx RF safety testing. eg. Bandedge

Step0: Get default tx power index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE # ./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE # ./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE # ./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE # ./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5

RTL8761A	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
RTL8723D RTL8822B RTL8821C RTL8822C RTL8763B RTL8761B	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.

Step1: bt\_mp\_SetParam : Channel Number = 0~39

INDEX	VALUE
1	ChannelNumber
7	TxGainIndex

Step2: bt\_mp\_Exec(LE\_CONTINUE\_TX\_START = 28) or  
(FW\_LE\_CONTINUE\_TX\_START=36)

Step3: bt\_mp\_Exec(LE\_CONTINUE\_TX\_STOP = 29) or  
(FW\_LE\_CONTINUE\_TX\_STOP=37)

## 4.5 Hopping Test Mode(Certification- Dwell time)

In order to start hopping mode test, follow the steps below:

Step 1: bt\_mp\_SetParam....(to setting packet type:DH1,DH2....3DH5)

NAME	INDEX
BT_PKT_DH1	0
BT_PKT_DH3	1
BT_PKT_DH5	2
BT_PKT_2DH1	3
BT_PKT_2DH3	4
BT_PKT_2DH5	5
BT_PKT_3DH1	6
BT_PKT_3DH3	7

BT_PKT_3DH5	8
BT_PKT_LE	9
BT_PKT_NULL	10

INDEX	VALUE
2	PacketType
10	HoppingFixChannel (0 or 1)
1	ChannelNumber (0~78)
6	WhiteningCoeffValue

Step 2: bt\_mp\_Exec(HOPPING\_DWELL\_TIME = 21)

Step 3: bt\_mp\_Exec(HCI\_RESET = 0) to disable hopping mode.

PS. If HoppingFixChannel = 1, it enable fix channel that is controlled by “ChannelNumber”.

If HoppingFixChannel = 0, “ChannelNumber” is useless.

## 5. MP Mode Test Control Steps (Certification)

### 5.1 DUT Single Tone TX Mode

**For test , only use the commands below to implement the single tone signal.**

To Set Single-Tone Tx, step by step:

Step0: Get default tx power index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5

RTL8761A	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index, 1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
RTL8723D RTL8822B RTL8821C	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index, 1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.

Step1: **bt\_mp\_SetParam**

INDEX	VALUE
1	ChannelNumber
2	PacketType
3	PayloadType
6	WhiteningCoeffValue
7	TxGainIndex
9	PacketHeader
11	HitTarget

```
> bt_mp_SetParam 1,39;2,0x08;3,0x00;4,0x00;6,0xFF;7,0x07;9,0x3FFFF;11,0x000000c6967e
bt_mp_SetParam 1,39;2,0x08;3,0x00;4,0x00;6,0xFF;7,0x07;9,0x3FFFF;11,0x000000c6967e
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,11,0x00
```

In this example we use 0X3FFFF that different PACKET\_HEADER, please check PACKET\_HEADER table.

Step2: **Execute :**

**CONTINUE\_TX\_START = 15 or FW\_CONTINUE\_TX\_START=34**

```
> bt_mp_Exec 15
bt_mp_Exec 15
bt_mp_Exec[Success:0]
> bt_mp_Exec,15,0x00
```

Step 3: Stop Single-Tone Tx.

CONTINUE\_TX\_STOP = 17 or FW\_CONTINUE\_TX\_STOP=35

```
> bt_mp_Exec 17
bt_mp_Exec 17
bt_mp_Exec[Success:0]
> bt_mp_Exec,17,0x00
```

## 5.2 DUT TX Mode(MP)

In order to transmit a packet signal, follow the process below:

Step0: Get default tx power index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
RTL8761A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5
	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.

RTL8723D RTL8822B RTL8821C	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index, 1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
----------------------------------	---------	---

Step1: bt\_mp\_SetParam....

INDEX	VALUE
1	ChannelNumber
2	PacketType
3	PayloadType
4	TxPacketCount
6	WhiteningCoeffValue
7	TxGainIndex
9	PacketHeader
11	HitTarget

Step2: bt\_mp\_Exec(PACKET\_TX\_START =12) or (FW\_PACKET\_TX\_START=30)

Step3: bt\_mp\_Report 1 (if need report, to do..)

Step4: bt\_mp\_Exec(PACKET\_TX\_STOP =14) or (FW\_PACKET\_TX\_STOP=31)

## 5.2 DUT RX Mode(MP)

In order to receive a packet signal, follow the process below:

Step1: bt\_mp\_SetParam....

INDEX	VALUE
1	ChannelNumber
2	PacketType
3	PayloadType
6	WhiteningCoeffValue
9	PacketHeader
11	HitTarget

Step2: bt\_mp\_Exec(PACKET\_RX\_START =18) or (FW\_PACKET\_RX\_START=32)

Step3: bt\_mp\_Report 3

Step4: bt\_mp\_Exec(PACKET\_RX\_STOP=20) or (FW\_PACKET\_RX\_STOP=33)

PS. bt\_mp\_Report 3" should be excuted every 1s.

## 5.3 LE DUT Test Mode-TX/RX (MP)

To start LE TX DUT test mode, follow the steps below:

Step0: Get default tx power index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
RTL8761A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5
	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
RTL8723D RTL8822B RTL8821C	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.

Step 1: bt\_mp\_SetParam



INDEX	VALUE	Value Range
1	ChannelNumber	0~39
3	PayloadType	BT_LE_PAYLOAD_TYPE_PRBS9 = 0, BT_LE_PAYLOAD_TYPE_1111_0000 = 1, BT_LE_PAYLOAD_TYPE_1010 = 2, BT_LE_PAYLOAD_TYPE_PRBS15 = 3, BT_LE_PAYLOAD_TYPE_ALL1 = 4, BT_LE_PAYLOAD_TYPE_ALL0 = 5, BT_LE_PAYLOAD_TYPE_0000_1111 = 6, BT_LE_PAYLOAD_TYPE_0101 = 7,
7	TxGainIndex	1~MAX_POWER_INDEX
15	LEDataLen	0x00~0x25

Step 2: bt\_mp\_Exec(LE\_TX\_DUT\_TEST\_CMD = 22)

Step 3: bt\_mp\_Exec(LE\_DUT\_TEST\_END\_CMD=24) to stop LE TX DUT mode.

```
> bt_mp_SetParam 1,0x03;2,0x09;3,0x03;7,7;15,0x25
bt_mp_SetParam 1,0x03;2,0x09;3,0x03;7,7;15,0x25
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,15,0x00

> bt_mp_Exec 22
bt_mp_Exec 22
bt_mp_Exec[Success:0]
> bt_mp_Exec,22,0x00

> bt_mp_Exec 24
bt_mp_Exec 24
bt_mp_Exec[Success:0]
> bt_mp_Exec,24,0x00
```

To start LE RX DUT test mode, follow the steps below:

Step 1: bt\_mp\_SetParam

INDEX	VALUE	Value Range
1	ChannelNumber	0~39

Step 2: bt\_mp\_Exec(LE\_RX\_DUT\_TEST\_CMD=23)

Step 3: bt\_mp\_Exec(LE\_DUT\_TEST\_END\_CMD=24) to stop LE RX DUT mode.

Step 4: bt\_mp\_Report 11

## 6. MP Test Flow

Support function by chap is defined as:

Function	RTL8723B	RTL8703B	RTL8821A	RTL8761A	RTL8822B	RT8821C	RTL8822C	RTL8761B	Ameba	BBPRO	BBPRO2	BBLite	Bee	Bee2	Other
Thermal power tracking Enable/Disable	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Tx gain K							■	■	■	■	■	■	■	■	■
Tx flatness K							■	■	■	■	■	■	■	■	■
Tx Path loss							■	■	■	■	■	■	■	■	■
Set Tx Power level							■	■	■	■	■	■	■	■	■

### 6.1 Mass Production Initial and basic commands of Test Flow by Non-signaling Mode

In the initial stage, the Bluetooth device must set to factory default.

#### 6.1.1 Disable TX power tracking

For Linux/Android platform: In bt RF(MP) test mode, use the following command to set it.

Disable:	Enable:
<code>bt_mp_SetParam 18,0,0</code> <code>bt_mp_Exec 42</code>	<code>bt_mp_SetParam 18,0,1</code> <code>bt_mp_Exec 42</code>

#### 6.1.2 Set TX gain cal (K) value

If you need to calibrate TX power to target tx power , then must reset the TX gain Cal Value.

For Linux/Android platform: In bt RF(MP) test mode, use the following command to complete.

`bt_mp_SetParam 18,1,value`  
`bt_mp_Exec 45`

The **value** is Tx Gain k value.

#### 6.1.3 Set TX flatness Value

If you need to calibrate TX power for each frequency, then must set flatness value to 0 first.

For Linux/Android platform: In bt rf(MP) test mode, use the following command to complete.

`bt_mp_SetParam 18,1,value`  
`bt_mp_Exec 46`

The value is flatness k value and is 2byte (Word)

#### 6.1.4 Set TX path loss module Value

For verify TX performance need to setting temporarily set the current TX level. You can use the APIs below to set the device to the ram.

`bt_mp_SetParam 18,1,value`

`bt_mp_Exec 47`

The value is path loss value.

#### 6.1.5 Set TX Power Level To RAM

For verify TX performance need to setting temporarily set the current TX level. You can use the commands below to set the device to the ram.

`bt_mp_SetParam 18,0x31,0x38,0x38,0x31,0x31;//max ,1M,2M,3M,BLE1M,BLE2M`

`bt_mp_Exec 51`

#### 6.1.6 Set Crystal cap vale

If need to set crystal cap then use this commands to set it.

`bt_mp_SetParam 14,vaule`

`bt_mp_Exec 10`

```
> bt_mp_SetParam 14,0x20
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,14,0x00


> bt_mp_Exec 10
bt_mp_Exec[Success:0]
> bt_mp_Exec,10,0x00
█
```

The value is crystal cap value.

## 6.2 Bluetooth Calibrates Crystal (Xtal) Cap by Non-Signaling mode

First, take a look at eFuse content about setting of Crystal Cap. . Normal driver will load this value in initial step. So this value must be well-calibrated and filled on correct eFuse location.

The flow of calibration Bluetooth step is as below:

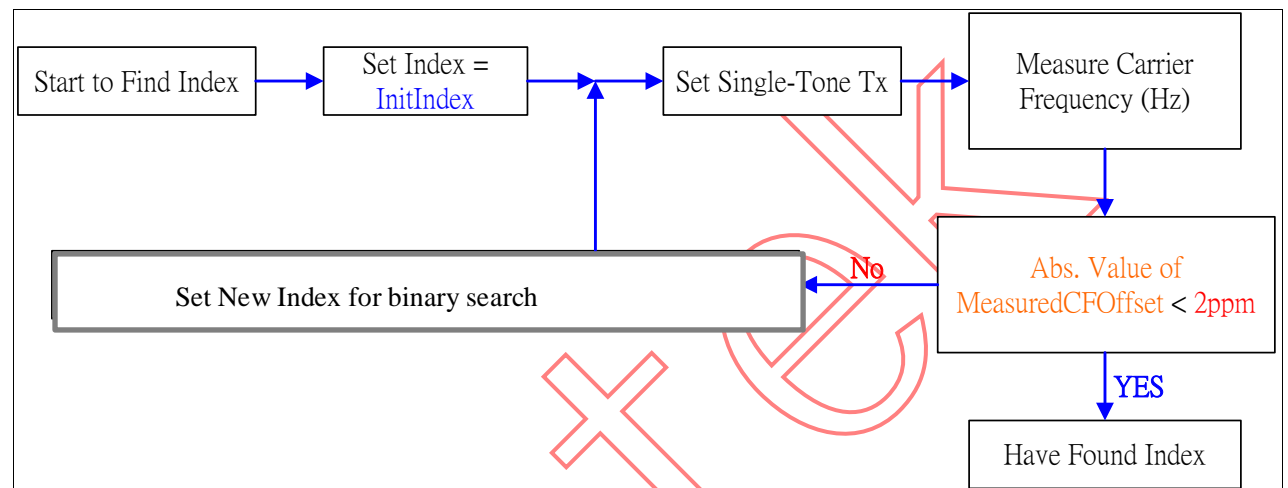

### Finding Crystal Cap. Index Flow

**InitIndex:** the default value is 0x20. Index range is 0x0 to 0x3F.

**MeasuredCFOffset:** Carrier frequency measured by instrument - Ideal Carrier Frequency Target range Abs. Value of 2ppm in 2.441GHz band is about 10KHz(±5KHz).

Step1 : Get default tx gain index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE

RTL8761A		Default Tx Index 1M/2M/3M/LE : 6/6/6/5
	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index, 1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
RTL8723D RTL8822B RTL8821C	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index, 1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.
RTL8723B RTL8822C RTL8761B		

Step 2: Set Index = `InitIndex(0x20)`

```
> bt_mp_SetParam 14,0x20
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,14,0x00

> bt_mp_Exec 10
bt_mp_Exec[Success:0]
> bt_mp_Exec,10,0x00
```

Step 3: Set Single-Tone Tx

```
Channel=39;
PacketType=3DH5;
PayloadType=ALL0;
TxPacketCount=Infinite;
WhiteningCoeffValue =0xFF(disable);
TxGainIndex=7;
PacketHeader=0XA078;
HitTarget= 0x000000c6967e
CONTINUE_TX_START = 15 or FW_CONTINUE_TX_START=34
```

```
> bt_mp_SetParam 1,39;2,0x08;3,0x00;4,0x00;6,0xFF;7,0x07;9,0x3FFFF;11,0x000000C6967E
bt_mp_SetParam[Success:0]
> bt_mp_SetParam,11,0x00
```

In this example we use 0X3FFFF that different PACKET\_HEADER, please check PACKET\_HEADER table.

```
> bt_mp_Exec 15
bt_mp_Exec[Success:0]
> bt_mp_Exec,15,0x00
```

Step 4: Stop Single-Tone Tx.

CONTINUE\_TX\_STOP = 17 or FW\_CONTINUE\_TX\_STOP=35

```
> bt_mp_Exec 17
bt_mp_Exec[Success:0]
> bt_mp_Exec,17,0x00
```

Step 5: Go to Step2and re-tune Index value until find the best Crystal index value.

## 6.3 Verify Bluetooth Legacy Tx Performance by Non-Signaling mode

To measure the DUT TX power/initial Carrier offset/modulation characteristics to check Tx performance is ok or not. Bluetooth TX criterion is shown as below:

	Test Item	Sub Test Item	Packet Type	Channel	Criterion
					Bluetooth Spec.
Verify Tx DH1	Maximum Output Power	Average Power	DH1	Low (CH6-2408MHZ)	> 0dBm
				Middle (CH42-2444MHZ)	> 0dBm
				High (CH70-2472MHZ)	> 0dBm
	Modulation Characteristics	Delta F1 Avg.	DH1	Low (CH6-2408MHZ)	140KHz ~ 175KHz
		Delta F2 Max.		Middle (CH42-2444MHZ)	> 115KHz
		Modulation Index		High (CH70-2472MHZ)	> 0.8
	Initial Carrier Frequency Error		DH1	Low (CH6-2408MHZ)	-20KHz ~ 20KHz
Middle (CH42-2444MHZ)					
High (CH70-2472MHZ)					
Verify Tx 3DH1	Maximum Output Power	Average Power	3DH1	Low (CH6-2408MHZ)	> 0dBm
				Middle (CH42-2444MHZ)	> 0dBm
				High (CH70-2472MHZ)	> 0dBm
	Modulation Characteristics	RMS DEVM	3DH1	Low (CH6-2408MHZ)	0.13
		Peak DEVM		Middle (CH42-2444MHZ)	0.25
		99% DEVM		High (CH70-2472MHZ)	0.20
	Initial Carrier Frequency Error		3DH1	All	-20KHz ~ 20KHz

**Table The recommended test items of Bluetooth Tx**

For example, use adb commands android platform, device is UART interface.  
step by step command:

(1) Enter MP Mode and download patch code

```
root@tristan-PORTEGE-R700:~# rtlbtmp

::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
::::::::: Bluetooth MP Test Tool Starting ::::::::::
> enable uart:/dev/ttyUSB0
> > > enable[Success:0]
```

Get default tx gain index

IC TYPE	MODE	GET DEFAULT POWER
RTL8723B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index(usb) 1M/2M/3M/LE : 5/5/5/4 Default Tx Index(uart) 1M/2M/3M/LE : 4/4/4/4
RTL8821A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 7/7/7/6
RTL8703B	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/6
RTL8761A	UI mode	<b>Load Tx Table</b> # ./bt_mp_Exec 5 // SET TX GAIN TABLE #./ bt_mp_Exec 6 //SET TX DAC TABLE Default Tx Index 1M/2M/3M/LE : 6/6/6/5
	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Retuen format] 17,Status, max tx power index,</b> <b>1M, 2M, 3M, LE default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.



RTL8723D RTL8822B RTL8821C	FW mode	<b>Get Tx Power Info</b> #./ bt_mp_Exec 38 #./bt_mp_Report 17 <b>[Return format] 17,Status, max tx power index, 1M, 2M, 3M, LE 1M, BLE 2M ,BLE LR default tx power index</b> The range of "TxGainIndex" value is from 0 to max tx index.(The value is default tx power level in 25 deg C)
----------------------------------	---------	---

(2) Set Parameter :

Test Item		adb command
	Test Item	Channel = 6
DH1	Maximum Power	bt_mp_SetParam 1,0x06;2,0x00;3,0x07;4,0x00;6,0x7F;7,0x7;9, 0x33820;11,0x0000009e8b33
DH1	Delta F1	bt_mp_SetParam 1,0x06;2,0x00;3,0x05;4,0x00;6,0xFF;7,0x7;9, 0x33820;11,0x0000009e8b33
DH1	Delta F2	bt_mp_SetParam 1,0x06;2,0x00;3,0x02;4,0x00;6,0xFF;7,0x7;9, 0x33820;11,0x0000009e8b33
3DH1	ALL	bt_mp_SetParam 1,0x06;2,0x06;3,0x07;4,0x00;6,0x7F;7,0x7;9, 0x15C40;11,0x0000009e8b33

Test Item		adb command
	Test Item	Channel = 42
DH1	Maximum Power	bt_mp_SetParam 1,0x2a;2,0x00;3,0x07;4,0x00;6,0x7F;7,0x7;9, 0x33820;11,0x0000009e8b33
DH1	Delta F1	bt_mp_SetParam 1,0x2a;2,0x00;3,0x05;4,0x00;6,0xFF;7,0x7;9, 0x33820;11,0x0000009e8b33
DH1	Delta F2	bt_mp_SetParam 1,0x2a;2,0x00;3,0x02;4,0x00;6,0xFF;7,0x7;9, 0x33820;11,0x0000009e8b33
3DH1	ALL	bt_mp_SetParam 1,0x2a;2,0x06;3,0x07;4,0x00;6,0x7F;7,0x7;9, 0x15C40;11,0x0000009e8b33

Test Item		adb command
	Test Item	Channel = 70
DH1	Maximum Power	bt_mp_SetParam 1,0x46;2,0x00;3,0x07;4,0x00;6,0x7F;7,0x7;9, 0x33820;11,0x0000009e8b33
DH1	Delta F1	bt_mp_SetParam 1,0x46;2,0x00;3,0x05;4,0x00;6,0xFF;7,0x7;9, 0x33820;11,0x0000009e8b33
DH1	Delta F2	bt_mp_SetParam 1,0x46;2,0x00;3,0x02;4,0x00;6,0xFF;7,0x7;9, 0x33820;11,0x0000009e8b33
3DH1	ALL	bt_mp_SetParam 1,0x46;2,0x06;3,0x07;4,0x00;6,0x7F;7,0x7;9, 0x15C40;11,0x0000009e8b33

(3)Run Packe Tx

(PACKET\_TX\_START =12) or (FW\_PACKET\_TX\_START=30)

```
> bt_mp_Exec 12
bt_mp_Exec[Success:0]
> bt_mp_Exec,12,0x00
```

(4) measured by Bluetooth test instrument (e.g. Litepoint IQNxnN)

```
> bt_mp_Report 1
bt_mp_Report[Success:0]
> bt_mp_Report,1,0x00,0x042402a8,0x00002139
█
```

(5)Stop Packet Tx

(PACKET\_TX\_STOP =14) or (FW\_PACKET\_TX\_STOP=31)

```
> bt_mp_Exec 14
bt_mp_Exec[Success:0]
> bt_mp_Exec,14,0x00
█
```

-- If you need to test other parameters, please stop packet tx and go back to step 2

(6)exit MP Mode

```
> disable
disable[Success:0]
> quit
::::::::: Bluetooth MP Test Tool Terminating ::::::::::
root@tristan-PORTEGE-R700:~# █
```

## 6.4 Verify Bluetooth Rx Performance by Non-Signaling mode

Measure the DUT Rx sensitivity to check Rx performance is ok or not. The Rx performance test can be measured in Signaling mode (ex: Anritsu 8852B, Agilent N4010A) or Non-Signaling mode (ex: LitePoint IQNxn). Bluetooth Rx criterion is shown as below:

Verify Bluetooth Rx	Test Item	Packet Type	Criterion
			Bluetooth Spec
	Sensitivity	DH1 or 3DH5	< <b>-70dBm</b>

For final MP, Rx can just test DH1, 3DH5 BER at sensitivity criterion power level at channel 0 and 78 to reduce time. All Bluetooth Rx criterion is shown as:

Test Item		Criterion(Bluetooth Spec)
Channel	Packet type	< -70dBm
6	DH1	< -70dBm
42	DH1	< -70dBm
70	DH1	< -70dBm
6	3DH1	< -70dBm
42	3DH1	< -70dBm
70	3DH1	< -70dBm

**Figure The recommended test items of Bluetooth Rx**

(1) Enter MP Mode and download patch code

```
root@tristan-PORTEGE-R700:~# rtlbtmp
::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
::::::::: Bluetooth MP Test Tool Starting ::::::::::
> enable uart:/dev/ttyUSB0
> > > enable[Success:0]
█
```

Set default table

```
> bt_mp_Exec 5
bt_mp_Exec[Success:0]
> bt_mp_Exec,5,0x00

> bt_mp_Exec 6
bt_mp_Exec[Success:0]
> bt_mp_Exec,6,0x00
█
```

(2) Set Parameter

Test Item		adb command
Channel	Packet type	PayloadType=PRBS9; WhiteningCoeffValue= 0xFF(disable); PacketHeader= <b>PACKET_HEADER Table</b> ; HitTarget= 0x000000c6967e
6	DH1	bt_mp_SetParam 1,0x06;2,0x00;3,0x07;6,0xFF;9, 0x33820;11,0x000000c6967e
42	DH1	bt_mp_SetParam 1,0x2a;2,0x00;3,0x07;6,0xFF;9, 0x33820;11,0x000000c6967e
70	DH1	bt_mp_SetParam 1,0x46;2,0x00;3,0x07;6,0xFF;9, 0x33820;11,0x000000c6967e
6	3DH1	bt_mp_SetParam 1,0x06;2,0x06;3,0x07;6,0xFF;9, 0x15C40;11,0x000000c6967e
42	3DH1	bt_mp_SetParam 1,0x2a;2,0x06;3,0x07;6,0xFF;9, 0x15C40;11,0x000000c6967e
70	3DH1	bt_mp_SetParam 1,0x46;2,0x06;3,0x07;6,0xFF;9, 0x15C40;11,0x000000c6967e

Please refer to Chapter 3.

(3)To setting Parameter with the Bluetooth test instrument. Bluetooth test instrument begin transmit..

(4)Run Packe Rx

(PACKET\_RX\_START =18) or (FW\_PACKET\_RX\_START=32)

```
> bt_mp_Exec 18
bt_mp_Exec[Success:0]
> bt_mp_Exec,18,0x00
█
```

(5) Report Received Result.

```
> bt_mp_Report 3
bt_mp_Report[Success:0]
> bt_mp_Report,3,0x00, -96,0x00000000,0x00000000,0x00000000
█
```

-- "bt\_mp\_Report 3" should be executed every 1s.

(6)Stop Packet Rx

(PACKET\_RX\_STOP=20) or (FW\_PACKET\_RX\_STOP=33)

```
> bt_mp_Exec 20
bt_mp_Exec[Success:0]
> bt_mp_Exec,20,0x00
█
```

-- If you need to test other parameters, please stop packet Rx and go back to step 2.

(7)exit MP Mode

```
> disable
disable[Success:0]
> quit
:::::::: Bluetooth MP Test Tool Terminating ::::::::::
root@tristan-PORTEGE-R700:~# █
```

## 6.5 Verify Bluetooth BLE Tx Performance

To measure the DUT BLE TX power and modulation index to check BLE TX performance is ok or not. Bluetooth BLE TX criterion is shown as below:

	Test Item	Sub Test Item	Payload Type	Channel	Criterion
					Bluetooth Spec.
Verify BLE Tx	BLE Output Power	Average Power	PRBS9	Low (CH0-2402MHZ)	> 0dBm
				Middle (CH19-2440MHZ)	> 0dBm
				High (CH34-2470MHZ)	> 0dBm
	Modulation Characteristics	Delta F1 Avg.	BT_PAYLOAD_TYPE_1111_0000	2440MHZ	225 kHz ~ 275 kHz
		Delta F2 Max.	BT_PAYLOAD_TYPE_1010	CH19-	≥ 185 kHz
		Modulation Index	None		≥ 0.8

**Table The recommended test items of Bluetooth BLE Tx**

For example, use adb commands android platform, device is UART interface.

step by step command:

- (1) Enter MP Mode and download patch code
- (2) Set Parameter :

Test Item		adb command
Channel	Test item	PayloadType=PRBS9; WhiteningCoeffValue = 0x(dis80able); PacketHeader=PACKET_HEADER Table; HitTarget= 0x000000c6967e
0	Avg_power	bt_mp_SetParam 1,0x00;3,0x00;7,0x06
19	Avg_power	bt_mp_SetParam 1,0x13;3,0x00;7,0x06
34	Avg_power	bt_mp_SetParam 1,0x22;3,0x00;7,0x06
0	Delta F1	bt_mp_SetParam 1,0x00;3,0x01;7,0x06
0	Delta F2	bt_mp_SetParam 1,0x00;3,0x02;7,0x06

## 6.6 Verify Bluetooth BLE Rx Performance

Measure the DUT BLE Rx sensitivity to check Rx performance is ok or not. The Bluetooth Rx criterion is shown as below:

Channel	Payload Type	BLE sensitivity limit	Criterion Bluetooth Spec
Low (CH0-2402MHZ)	PRBS9	PER<= 30.800 %	< -70dBm
Middle (CH19-2440MHZ)			
High (CH34-2470MHZ)			

**Figure The recommended test items of Bluetooth BLE Rx**

To calculate the Packet Error Rate(PER)

$$\text{PER}\% = 100 * (1 - (\text{Packets Received} / \text{Packets Send}))$$

The step by step list below :

(1) Enter MP Mode and download patch code

(2) Set Parameter :

Test Item		adb command
Item	Payload type	
Sensitivity	PRBS9	bt_mp_SetParam 1,0x00;3,0x0
Sensitivity	PRBS9	bt_mp_SetParam 1,0x13;3,0x0
Sensitivity	PRBS9	bt_mp_SetParam 1,0x22;3,0x0

(3) To setting Parameter with the Bluetooth test instrument.

(4) Run LE Packet Rx

(5) Stop LE Packet Rx and to obtain the receive packet count

(6) Calculate PER

If ( PER < limit ) , goto step (3) , else Stop